




TECH-MEN ELECTRONICS COMPONENTS

Supply * Sub Assemblies * Taping/ Forming Components
Co. Reg. No: 45730100K

Zero Ohm

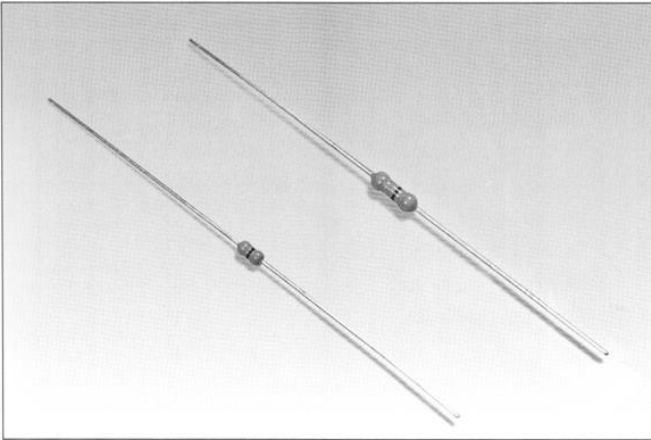

FEATURES:

- ❖ Inability to connect two points on a P.C. board due to other circuit paths which must be crossed over.
- ❖ An after-the-fact design change that requires new point connections.
- ❖ Available in Tape/Reel, Tape/Box and Bulk.
- ❖ Film type Zero Ohm also available in 1/6W(Z16) and 1/4W(Z25).
- ❖ Variety of packaging-bulk, tape on reel, cut and formed and radial tape/panasert.
- ❖ Flame Proof coating also available, meet UL-1412 specification.
- ❖ Lead free and RoHS compliant part.



GENERAL SPECIFICATIONS

TYPE	FINISHED DIMENSIONS (MM)			
	L	D	H	d
Z16	3.5 ± 0.5	1.9 ± 0.5	28 ± 1.0	0.45 ± 0.05
Z25	6.5 ± 0.5	2.3 ± 0.5	27 ± 1.0	0.55 ± 0.05

RATINGS

TYPE	RESISTANCE	OPERATING TEMP. RANGE	MAX. ALLOWABLE CURRENT	RATED AMBIENT TEMP.
Z16	LESS THAN 20mΩ	-55 °C ~ +155 °C	1.6A	70 °C
Z25			2.5A	

ORDERING FORMAT

